

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 10 TOWNSHIP 14 RANGE 4

DATE: 6-07-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 8-31-98

IN. S.P.C. E ZONE NAD '83

NAME: 14041001

N: 492141.4467(m)

E: 64323.9961(m)

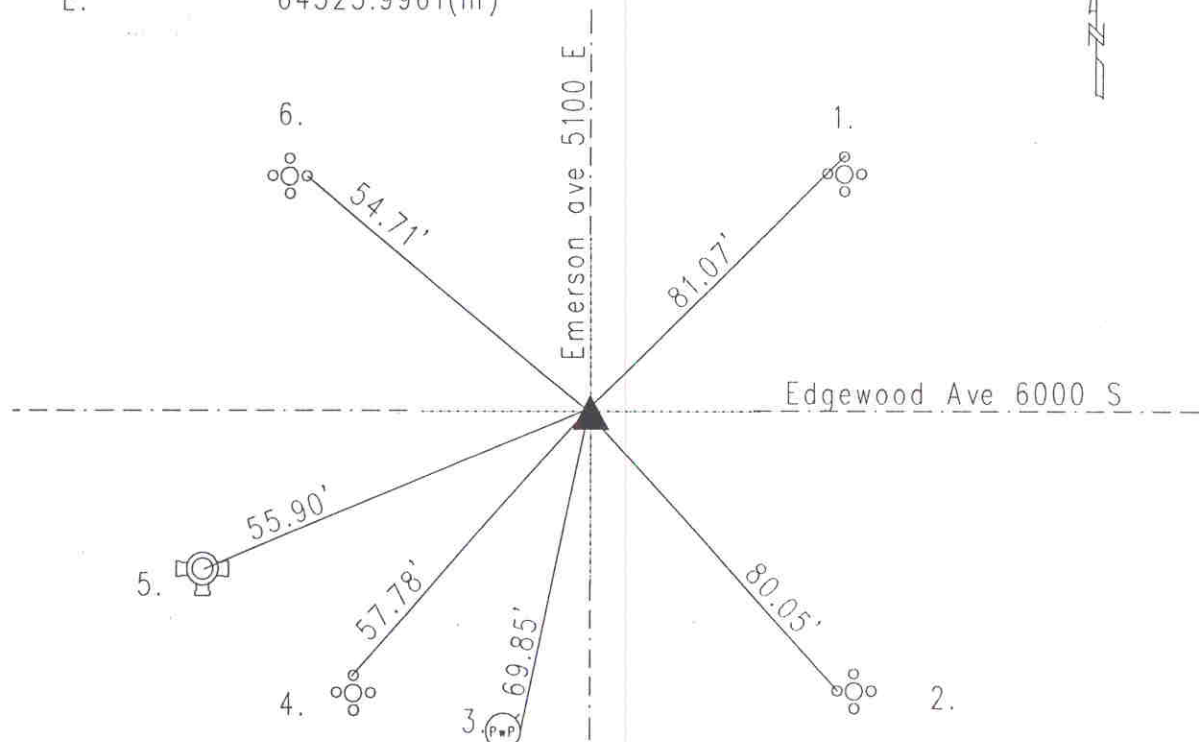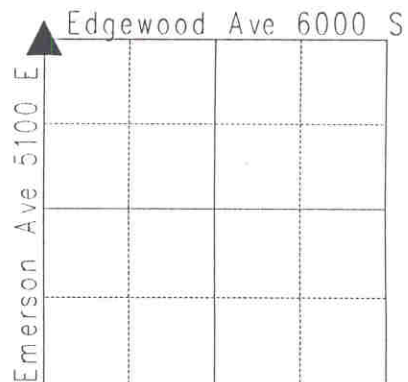

Original post set 1820 by Hendricks with witnesses: 9" beech N 24 W 29 links; 7" sugar S 63 W 6 links per Marion County Atlas pg. 9. Hosbrook 3-6-1855 called no stone nor witness per Franklin Township Legal Survey Book pg. 19.

Excavated by Wilcoxon 8-6-84 and railroad spike was found 2" down.

Iron pin found 8" down. An old stake was found 12" down. No stone found during excavated by Wilcoxon. 1-13-87 railroad spike with cut 'x'. Wilcoxon 4-12-96 called railroad spike. Excavated by Wilcoxon 8-31-98 railroad spike was found 5" down. Harrison set. 14041001

REF.	DISTANCE	DESCRIPTION
1.	81.07'	Cut 'x' N-bolt of aluminum pole
2.	80.05'	Cut 'x' W-bolt of aluminum pole
3.	69.85'	PK nail E PwP#12-732 12"up
4.	57.78'	Cut 'x' N-bolt aluminum pole
5.	55.90'	Top nut of fire hydrant
6.	54.71'	Cut 'x' E-bolt aluminum pole